


Available Finishes / Materials:

- EG -- Electro-galvanized
- HD -- Hot dipped galvanized
- S6 -- 316 stainless steel

Standard Finish: EG

Catalog Number	Thread Size	Thickness		Wt. lbs
		in	mm	
CNS2D025EG	¼"-20	0.25	6.3	0.068
CNS2D031EG	5/16"-18	0.25	6.3	0.068
CNS3D031EG	5/16"-18	0.37	9.4	0.092
CNS2D037EG	3/8"-16	0.25	6.3	0.070
CNS3D037EG	3/8"-16	0.37	9.4	0.088
CNS3D050EG	½"-13	0.37	9.4	0.087
CNS3D062EG	5/8"-11	0.37	9.4	0.104

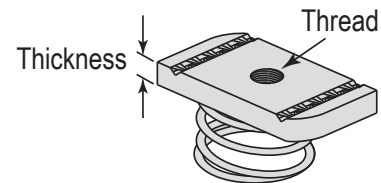

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Phoenix products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Phoenix EG products meet ASTM B633 SC1 Type III.

HD – Hot Dip Galvanized After Fabrication. Fabricated product is dipped in molten zinc and is completely covered on all surfaces. Recommended for outdoor use. Coatings on Phoenix HD products meet ASTM A123/153. The zinc coating is typically 2.6 mils [66.0 µm] or 1.5 oz. per square foot [0.46 kg per square meter] per side.

S6 – 316 Stainless Steel – ASTM A240 (Type 316),
 316 Stainless Steel Nuts – ASTM A276-03

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		