F – Flange Clip

Available Finishes / Materials:
☐ VG -- Phoenix Vanguard
Standard Finish: VG



F



F S

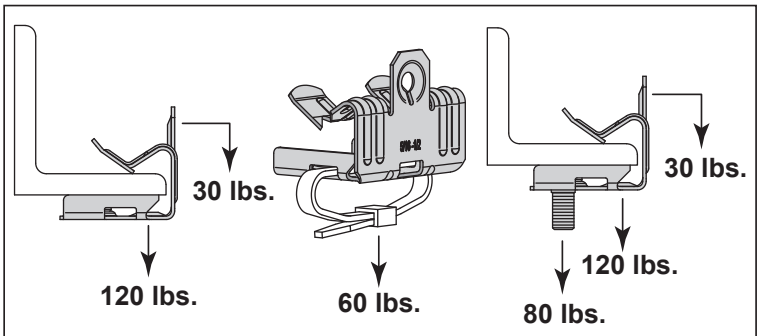

* Loads are static load limits and should not be combined.

- Multi use beam clamp used to support threaded rod, electrical boxes and bridal rings from beam flanges.
- Beam clamp with stud is for supporting electrical boxes from beam flanges.
- Punched holes provided for zip tie applications.
- Provided 1/4-20 thread forms permit threaded rod applications.
- Only a hammer required for installation.
- **Material:** Spring Steel
- **Finish:** Vanguard

Catalog No.	Flange Thickness	Stud Description	Box Qty
F2-4	1/8" - 1/4"	No Stud	100
F5-8	5/16" - 1/2"	No Stud	100
F9-12	9/16" - 3/4"	No Stud	100
F2-4S	1/8" - 1/4"	1/4-20 x 3/8" Long	100
F5-8S	5/16" - 1/2"	1/4-20 x 3/8" Long	100
F9-12S	9/16" - 3/4"	1/4-20 x 3/8" Long	100

Material Specifications and Finishes

Spring Steel:
Cold Roll, ASTM A684 Grade 1055 Spring Steel

VG – Phoenix Vanguard

Phoenix Vanguard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. **Vanguard coating is WEEE, ELV and RoHS compliant**. VG Finish is approved for wet and dry applications. It is a chrome free three step coating system that combines an inorganic zinc-rich basecoat with an aluminum-rich organic topcoat.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submited By:	Address:	
Comment		