


Available Finishes / Materials:

EG -- Electro-galvanized

Standard Finish: EG

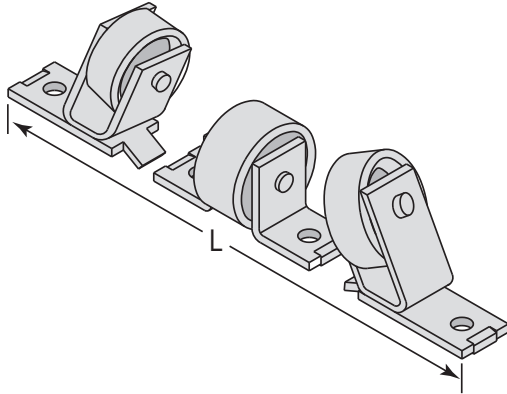

Max load rating of 2000 lbs. [8.90 kN] with 12ga channel

See page 64 for dimensions L and CL (Center Line)

Catalog Number: R23 0000EG

Weight: 14.72 Lbs.

| Pipe Size | Pipe Covering Thickness | | Actual O.D. of Pipe + Shield + Insulation | | Dimension L | | Dimension CL | |
|-----------|-------------------------------|-------|---|-------|----------------------------------|-------|--------------------------------|-------|
| | in | mm | in | mm | in | mm | in | mm |
| 16 | 0 | 0.0 | 16 | 406.4 | 12 ³ / ₄ | 323.9 | 11 ³ / ₈ | 288.9 |
| | 1 ¹ / ₂ | 38.1 | 19 ⁵ / ₈ | 498.5 | | | | |
| | 2 | 50.8 | 20 ³ / ₈ | 517.5 | | | | |
| | 2 ¹ / ₂ | 63.5 | 21 ⁵ / ₈ | 549.3 | | | | |
| | 3 | 76.2 | 22 ¹ / ₈ | 562.0 | | | | |
| | 4 | 101.6 | 24 ³ / ₈ | 619.1 | | | | |
| 18 | 0 | 0.0 | 18 | 457.2 | 12 ³ / ₄ | 323.9 | 12 ¹ / ₄ | 311.2 |
| | 1 ¹ / ₂ | 38.1 | 21 ⁵ / ₈ | 549.3 | | | | |
| | 2 | 50.8 | 22 ⁵ / ₈ | 574.7 | | | | |
| | 2 ¹ / ₂ | 63.5 | 23 ¹ / ₄ | 590.6 | | | | |
| | 3 | 76.2 | 24 ¹ / ₄ | 616.0 | | | | |
| | 4 | 101.6 | 26 ⁵ / ₈ | 676.3 | | | | |
| 20 | 0 | 0.0 | 20 | 508.0 | 14 ¹ / ₈ | 358.8 | 13 ¹ / ₄ | 336.6 |
| | 1 ¹ / ₂ | 38.1 | 23 ¹ / ₄ | 590.6 | | | | |
| | 2 | 50.8 | 24 ¹ / ₂ | 622.3 | | | | |
| | 2 ¹ / ₂ | 63.5 | 25 ¹ / ₂ | 647.7 | | | | |
| | 3 | 76.2 | 26 ⁵ / ₈ | 676.3 | | | | |
| | 4 | 101.6 | 28 ¹ / ₄ | 717.6 | | | | |
| 24 | 0 | 0.0 | 24 | 609.6 | 14 ¹³ / ₁₆ | 376.2 | 15 ¹ / ₄ | 387.4 |
| | 1 ¹ / ₂ | 38.1 | 27 | 685.8 | | | | |
| | 2 | 50.8 | 28 | 711.2 | | | | |
| | 2 ¹ / ₂ | 63.5 | 29 ¹ / ₄ | 743.0 | | | | |
| | 3 | 76.2 | 30 ¹ / ₂ | 774.7 | | | | |
| | 4 | 101.6 | 32 ⁷ / ₈ | 835.0 | | | | |
| 30 | 0 | 0.0 | 30 | 762.0 | 15 ⁷ / ₈ | 403.2 | 16 ¹ / ₄ | 412.8 |

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use.

This is the standard coating for most Phoenix products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Phoenix EG products meet ASTM B633 SC1 Type III.

Note: Specifications subject to change without notice.

| | | |
|----------------------|-----------------|---------------|
| Project: | Date: | Phone: |
| Submitted By: | Address: | |
| Comment | | |