


Available Finishes / Materials:

EG -- Electro-galvanized

Standard Finish: EG

Catalog Number	EMT Size in (mm)	Rigid Conduit Size in (mm)	Thickness	Design Load Lbs.	Wt. lbs
SCH 0037EG	3/8 (10)	--	16 Ga. (1.5)	200	7.0
SCH 0050EG	1/2 (15)	--	16 Ga. (1.5)	200	7.4
SCH 0075EG	3/4 (20)	1/2 (15)	16 Ga. (1.5)	200	8.0
SCH 0100EG	1 (25)	3/4 (20)	14 Ga. (1.9)	300	11.0
SCH 0125EG	1 1/4 (32)	1 (25)	14 Ga. (1.9)	300	12.5
SCH 0150EG	1 1/2 (40)	1 1/4 (32)	12 Ga. (2.6)	400	20.5
SCH 0200EG	2 (50)	1 1/2 (40)	12 Ga. (2.6)	400	21.5
SCH 020REG	--	2 (50)	12 Ga. (2.6)	400	22.7
SCH 0250EG	2 1/2 (65)	2 1/2 (65)	12 Ga. (2.6)	400	26.0
SCH 0300EG	3 (80)	3 (80)	12 Ga. (2.6)	400	30.2
SCH 0350EG	3 1/2 (90)	3 1/2 (90)	12 Ga. (2.6)	400	33.3
SCH 0400EG	4 (100)	4 (100)	12 Ga. (2.6)	400	36.6

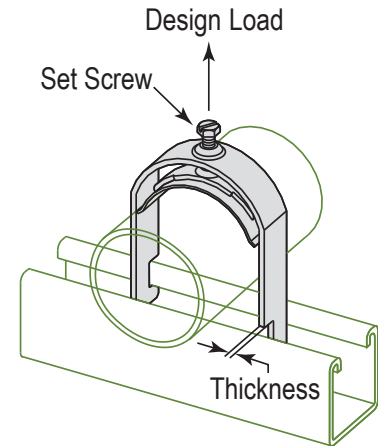

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Phoenix products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Phoenix EG products meet ASTM B633 SC1 Type III.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		