CCF – Cable Clip to Flange

Available Finishes / Materials:
☐ EG -- Electro-galvanized
Standard Finish: EG



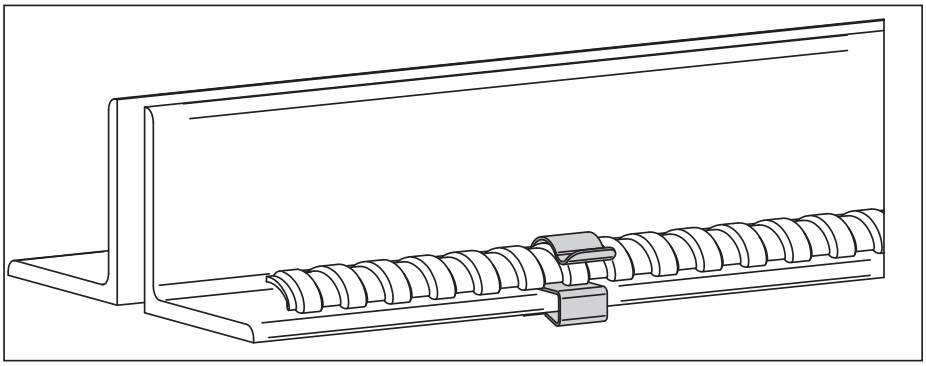

- Supports flexible conduit and cable from flanges.
- Simple Push-in clip design.
- **Material:** Steel
- **Finish:** Electro-Galvanized

Catalog No.	Flange Thickness	Cable O.D.	Box Qty
CCF2D	1/16" - 3/16"	0.46 - 0.56	100
CCF2E	1/16" - 3/16"	0.50 - 0.72	100
CCF4D	3/16" - 9/32"	0.46 - 0.56	100
CCF4E	3/16" - 9/32"	0.50 - 0.72	100
CCF8D	5/16" - 1/2"	0.46 - 0.56	100
CCF8E	5/16" - 1/2"	0.50 - 0.72	100
CCF8F	5/16" - 1/2"	0.75 - 0.937	100

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Phoenix products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Phoenix EG products meet ASTM B633 SC1 Type III.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submited By:	Address:	
Comment		