Installation and Instruction Sheets

CCF - CABLE CLIP TO FLANGE

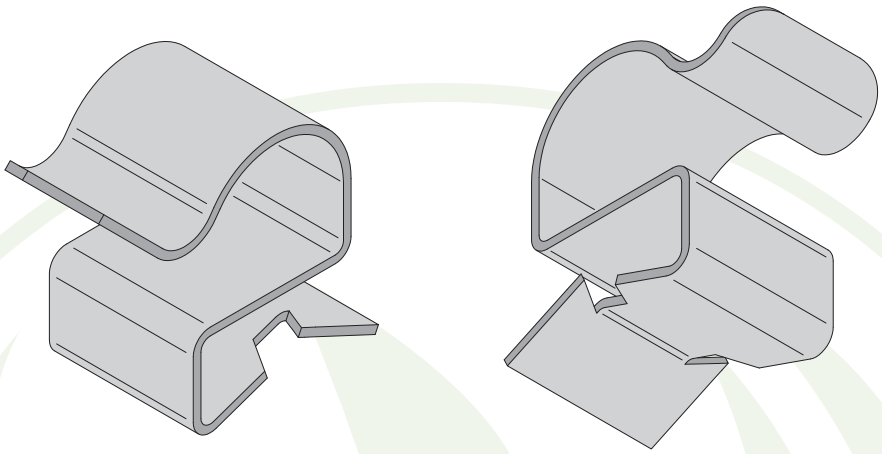

CCF INSTALLATION

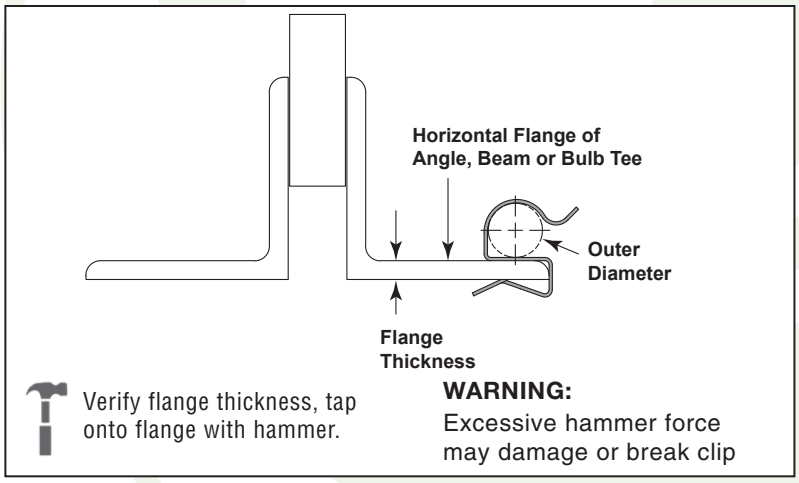

Catalog Number	Flange Thickness	Outer Diameter
CCF2D	1/16" - 3/16"	0.468 - 0.562
CCF4D	3/16" - 9/32"	0.468 - 0.562
CCF4E	3/16" - 9/32"	0.500 - 0.718
CCF8D	5/16" - 1/2"	0.468 - 0.562
CCF8E	5/16" - 1/2"	0.500 - 0.718

Made in USA

Notes:

- Supports flexible conduit & cable to flanges.
- See sheet 2 for common installations.
- For wet or dry applications.
- For positioning only.

PHOENIX SUPPORT SYSTEMS

Revision: R0

www.phoenixsupports.com • 800-721-0404

CUSTOMER RESPONSIBILITIES: At a minimum the customer(s) is responsible for using industry standard hardware and fasteners, inspecting the structural integrity of the structure to which Phoenix Support Systems products will be attached, conforming to all governing codes and regulations at the job site and following all safety precautions related to the work being performed.

WARNING: Phoenix Support Systems products must never be used for purposes other than those for which they were designed or in any way that exceeds published load ratings. All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads. Phoenix Support Systems products must be installed and used only as indicated in Phoenix Support Systems installation and instruction sheets. Improper installation, misuse, misapplication or any other failure to completely follow Phoenix Support System's instructions could lead to decreased load rating, product failure, property damage, injury or even death.

COMMON INSTALLATION:

Step 1: Install clip on flange.
Step 2: Install cable into clip.

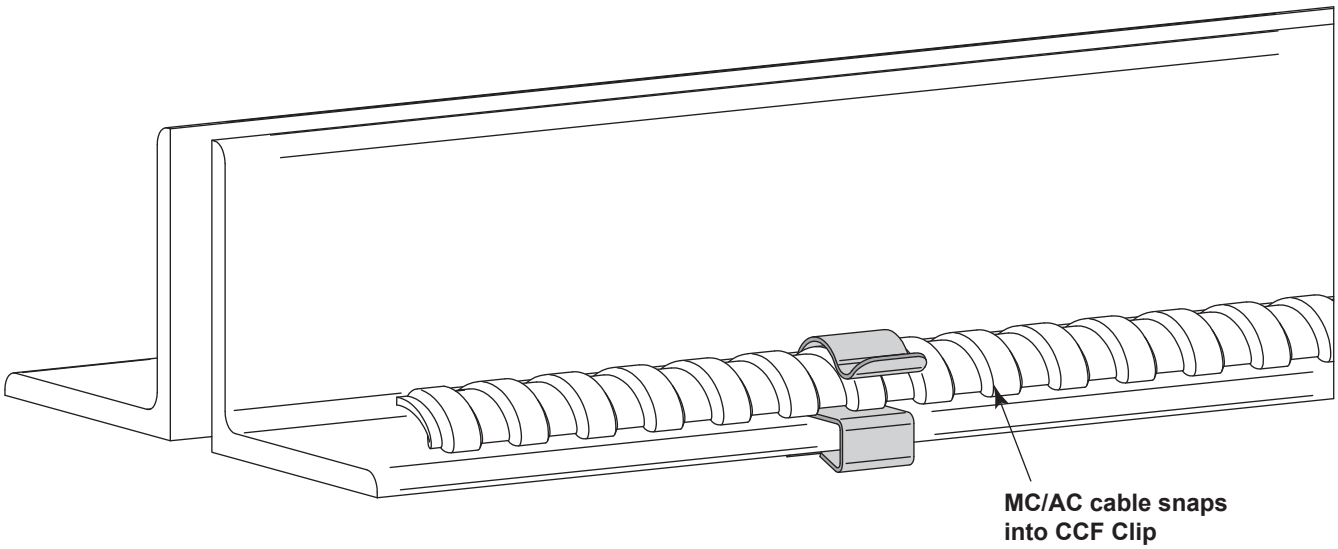

Phoenix Support Systems
931 Summit Avenue
Niles, Ohio 44446, USA
Fax: 330-505-9959

PHOENIX
SUPPORT SYSTEMS

Tel: 800-721-0404
www.phoenixsupports.com