Installation and Instruction Sheets

MF - MULTI-FUNCTION CLIP AND ASSEMBLIES



ITEM: A

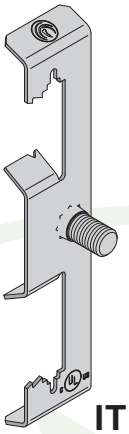

ITEM: B

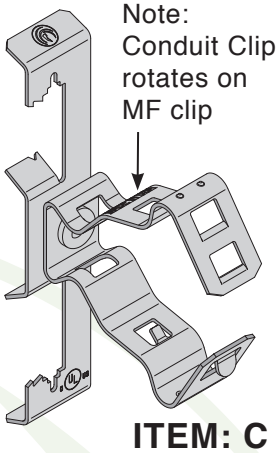

ITEM: C & D

FLANGE INSTALLATION

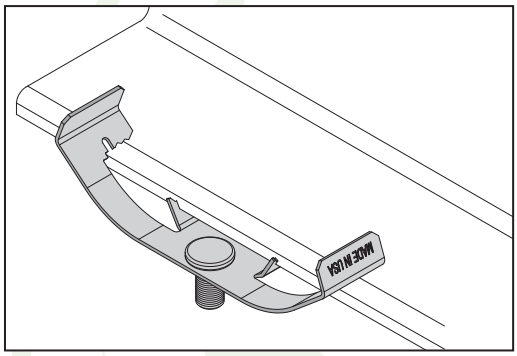

THREADED ROD INSTALLATION

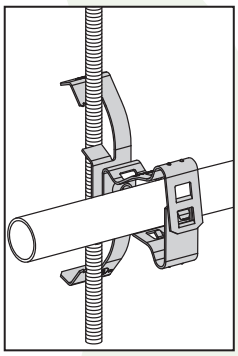

Made in USA

c UL us LISTED

Item	Catalog No.	Flange Size	Threaded Rod Size	Conduit Size or Threads
A	MF	1/8" - 3/8"	1/4" Threaded Rod	9/32 hole, 1/4-20 and 10-24 thread form
B	MFS	1/8" - 3/8"	1/4" Threaded Rod	1/4-20 staked stud with nut (UL listed box support)
C	MF C8-12	1/8" - 3/8"	1/4" Threaded Rod	1/2" EMT, IMC, Rigid 3/4" EMT, IMC, Rigid
D	MF C16	1/8" - 3/8"	1/4" Threaded Rod	1" EMT, IMC, Rigid

Notes:

- Dedicated drop wire/rod secured (anchor) at both ends required per NEC 300.11.
- UL Listed for new work support with 4", 4-11/16" and octagonal outlet boxes.
- For horizontal conduit and wire runs only.
- See page 2 for load ratings and common installations.
- For wet or dry applications.

Multi-function clips are for single use only.

Revision: 5

PHOENIX SUPPORT SYSTEMS

www.phoenixsupports.com • 800-721-0404

CUSTOMER RESPONSIBILITIES: At a minimum the customer(s) is responsible for using industry standard hardware and fasteners, inspecting the structural integrity of the structure to which Phoenix Support Systems products will be attached, conforming to all governing codes and regulations at the job site and following all safety precautions related to the work being performed.

WARNING: Phoenix Support Systems products must never be used for purposes other than those for which they were designed or in any way that exceeds published load ratings. All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads. Phoenix Support Systems products must be installed and used only as indicated in Phoenix Support Systems installation and instruction sheets. Improper installation, misuse, misapplication or any other failure to completely follow Phoenix Support System's instructions could lead to decreased load rating, product failure, property damage, injury or even death.

MF - MULTI-FUNCTION CLIP AND ASSEMBLIES

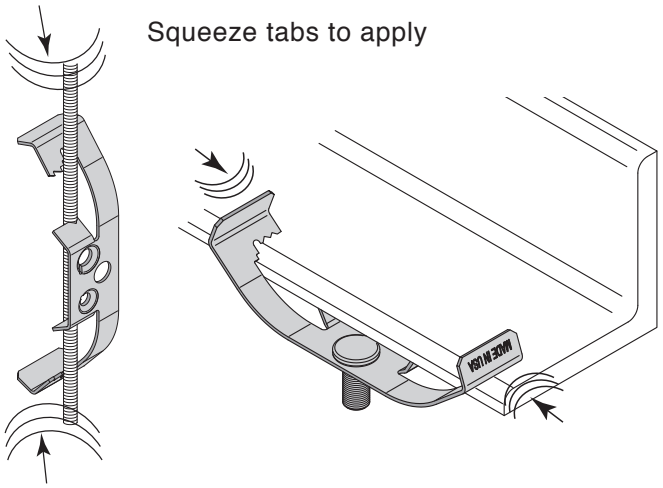

ITEM: C & D CONDUIT INSTALLATION

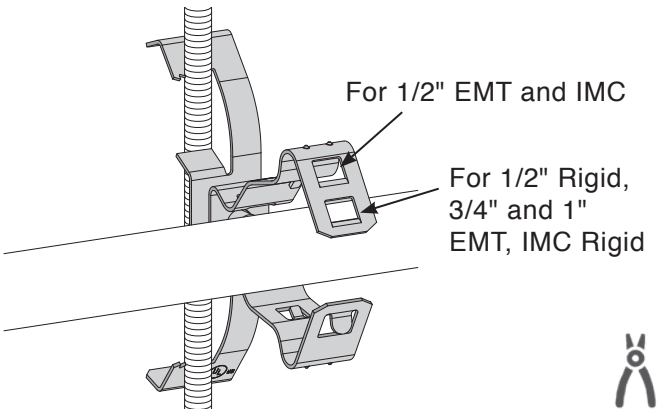

Verify lock window. Lock clip with fingers or pliers.

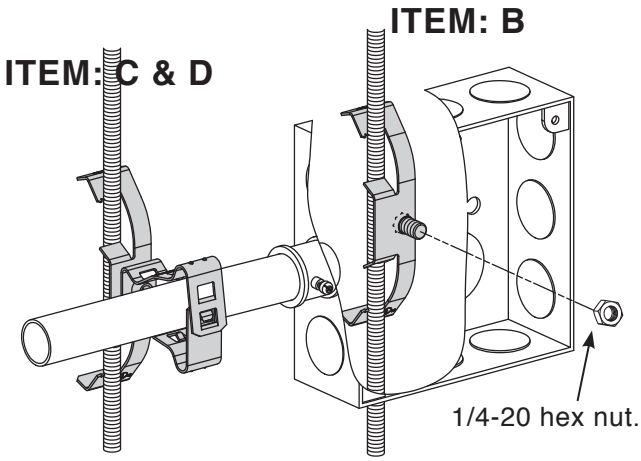

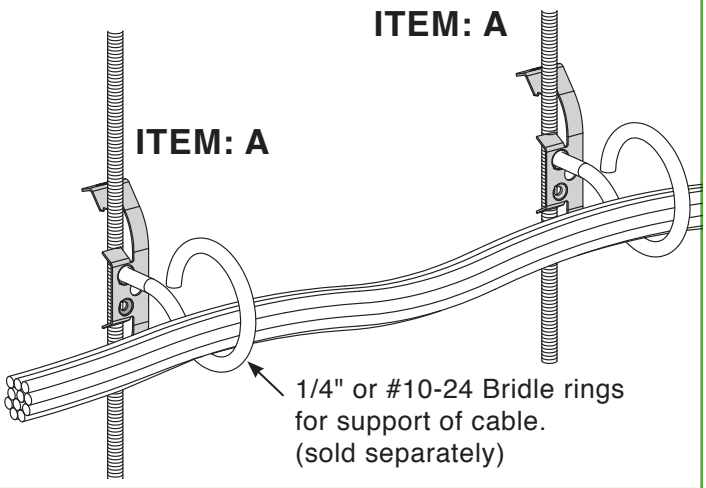

LOAD RATINGS: ITEM B

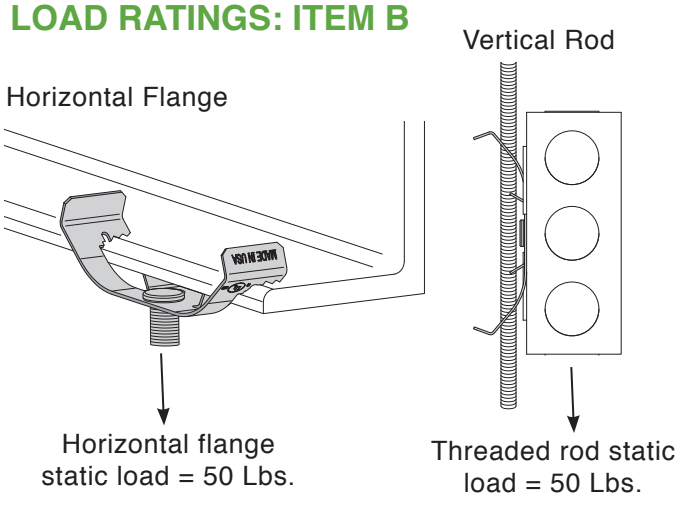

LOAD RATINGS: ITEM C & D

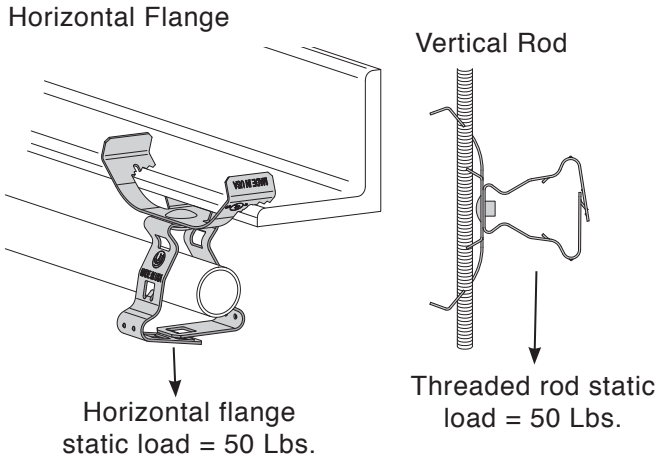

Phoenix Support Systems
931 Summit Avenue
Niles, Ohio 44446, USA
Fax: 330-505-9959

PHOENIX SUPPORT SYSTEMS

Tel: 800-721-0404
www.phoenixsupports.com